


PROTECH LED

be creative

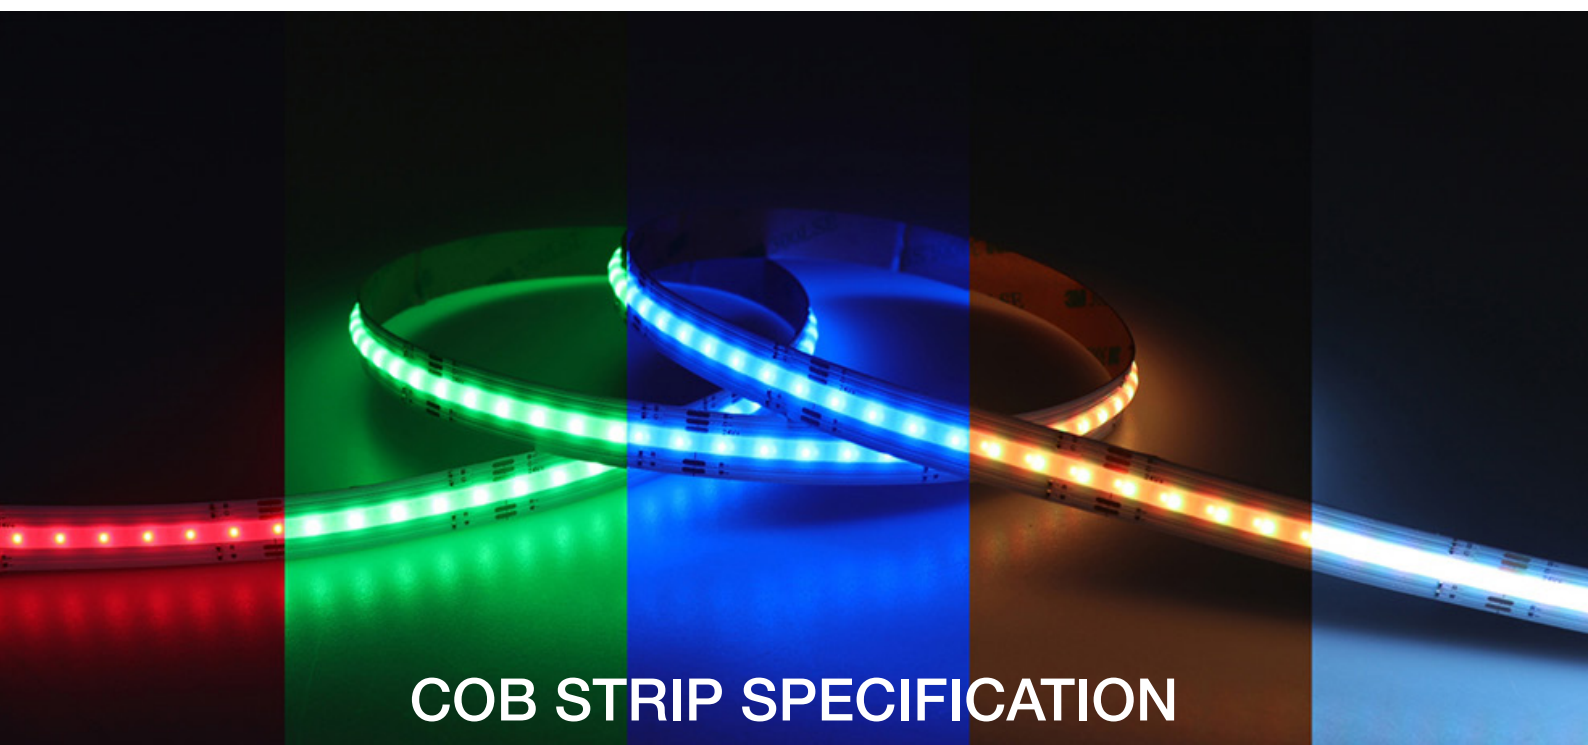

COB STRIP SPECIFICATION

AT-RGBW60-COB-PIXEL






AT-RGBW60-COB-PIXEL

DESCRIPTION

Pixel controlled LED, dotless, no hot spot.
24V, Step length: 71,4mm with 3M adhesive tape
on the back for easy installed. 120° beam angle.



DIMENSION

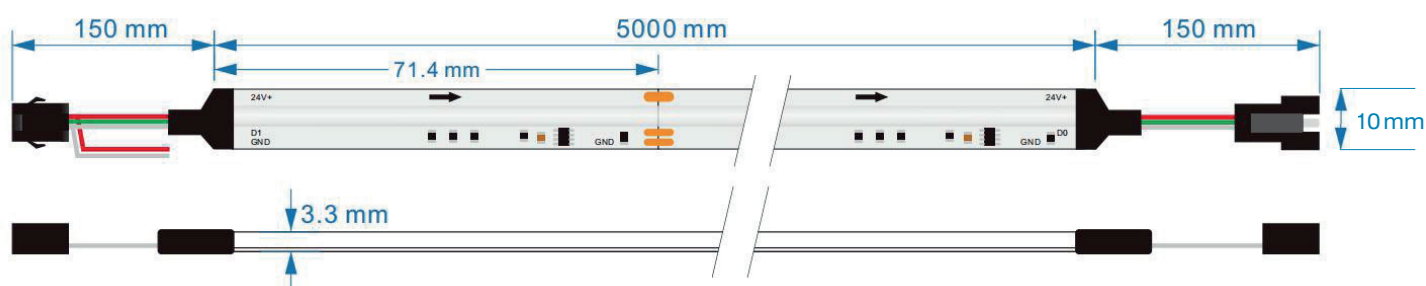

PRODUCT SPECIFICATION


Dimension	5000 x 10 x 3mm
IC Type	WS2814
Chips/m	784LED/m
Step LEDs	56 LEDs
Cutting Length	71,4 mm

Voltage (V)	DC24V
Current (A/m)	0,875
Power (W/m)	21 W
Beam Angle	120°
Operation Temperature	-20°C~50°C

PRODUCT PHOTOMETRICS

CCT (K)	Lumen (lm/m)	Efficacy (lm/w)	CRI	Power
RED	99	17,8	/	5,25
GREEN	369	66	/	5,25
BLUE	61	11	/	5,25
WHITE	330	58,8	/	5,25
RGBW	859	40	/	21

* the given electrical data reflect typical values, each can vary up to 10%.

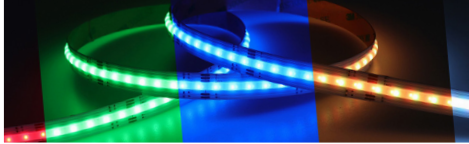

AT-RGBW60-COB-PIXEL

LIGHT DISTRIBUTION CURVE

