


PROTECH LED

be creative

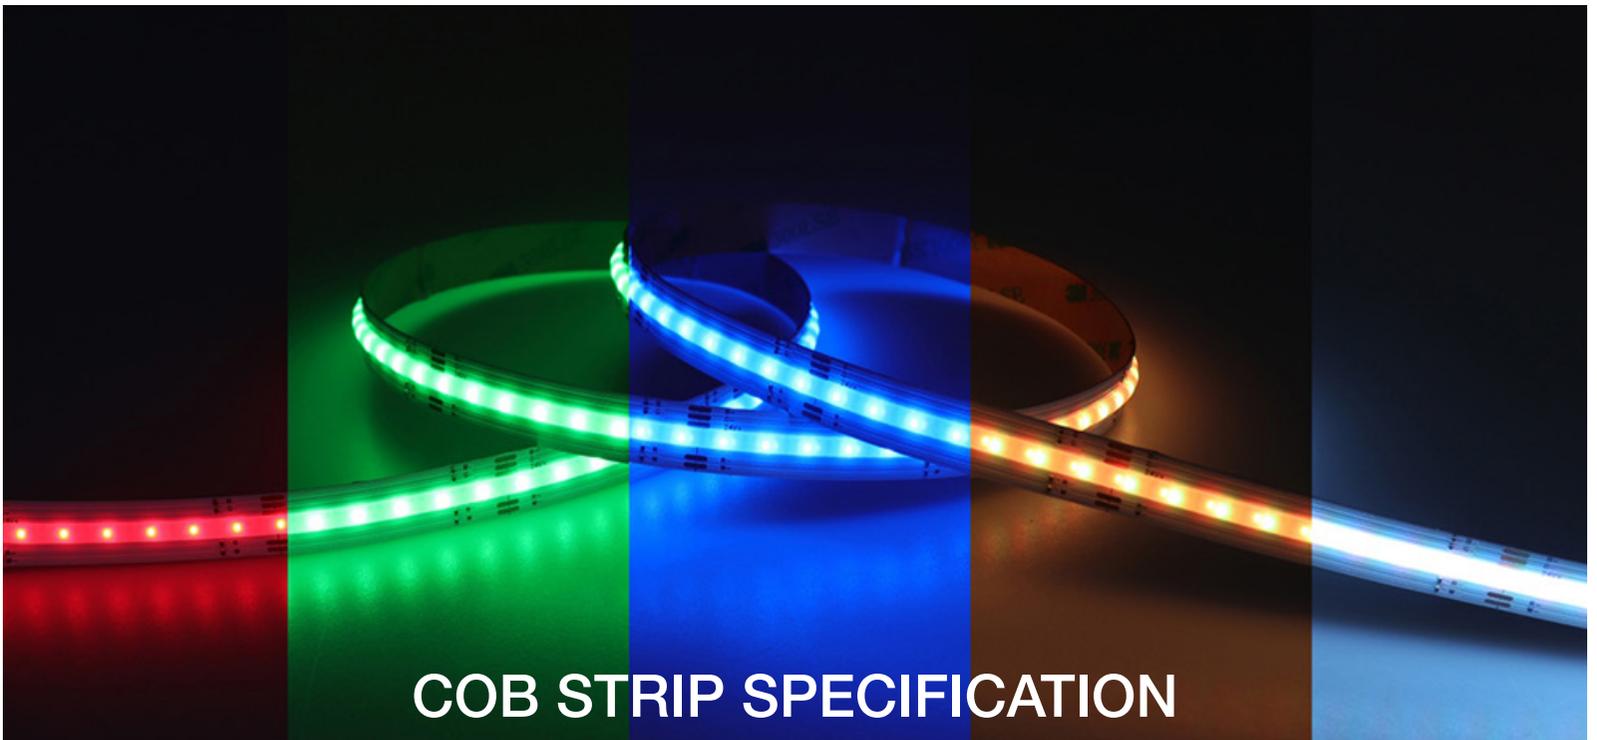

COB STRIP SPECIFICATION

AT-RGBW27-COB-PIXEL






AT-RGBW27-COB-PIXEL

DESCRIPTION

Pixel controlled LED, dotless, no hot spot.
24V, Step length: 71,4mm with 3M adhesive tape on the back for easy installed.120° beam angle.



DIMENSION

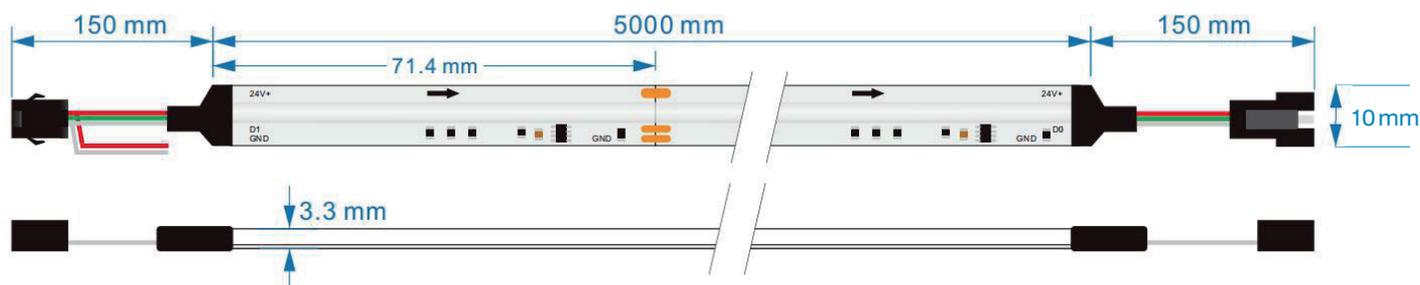

PRODUCT SPECIFICATION

Dimension	5000x 10 x 3mm	Voltage (V)	DC24V
IC Type	WS2814	Current (A/m)	0,875
Chips/m	784LED/m	Power (W/m)	21 W
Step LEDs	56LEDs	Beam Angle	120°
Cutting Length	71,4 mm	Operation Temperature	-20°C~50°C

PRODUCT PHOTOMETRICS

CCT (K)	Lumen (lm/m)	Efficacy (lm/w)	CRI	Power
RED	99	17,8	/	5,25
GREEN	369	66	/	5,25
BLUE	61	11	/	5,25
RGB	308	58,8	/	5,25
RGBW	840	40	/	21

* the given electrical data reflect typical values, each can vary up to 10%.



AT-RGBW27-COB-PIXEL

LIGHT DISTRIBUTION CURVE

